



FLOODLIGHT



5 year warranty

SXJ-N-LED

IP 65



Application: locations requiring continuous and consistent light levels in extreme ambient conditions.

Driver: Meanwell LED driver, 100-277Vac 50/60Hz

Led Technology: Luminaire efficacy exceeds 116lm/W

Body: Die cast aluminium with powder coat finish

Lens: Heat and impact resistant flat tempered glass
Beam angles: 45°, 90° and 120°

Mounting: Adjustable U-bracket

ATEX Certified: Zone 2/22
II 3 G Ex ec IIC T4 Gc IP65

AmbT.: -40°C to +40°C


Supply Voltage: 100-277VAC, 50/60Hz

Termination: 1m flying lead

(OPTIONAL): 1 x 3-pole Bulgin Explora plug&socket with set of seals

Weight: SXJ40: 4.5kg
SXJ100: 8.5kg
SXJ200: 11.5kg

Dimensions: SXJ40: 200x200x149mm
SXJ80/100: 300x300x175mm
SXJ120/150/200: 400x400x185mm

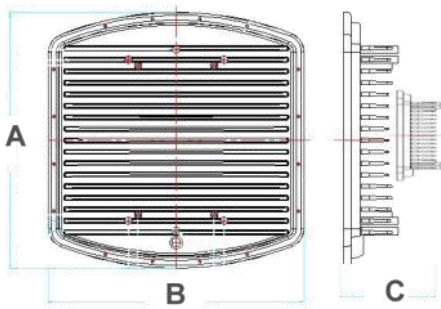

Code	Rated Power	Flux
SXJ40-N-LED-5K-xxx	40W	4,640lm
SXJ80-N-LED-5K-xxx	80W	9,700lm
SXJ100-N-LED-5K-xxx	100W	11,600lm
SXJ120-N-LED-5K-xxx	120W	14,950lm
SXJ150-N-LED-5K-xxx	150W	18,150lm
SXJ200-N-LED-5K-xxx	185W	21,460lm


xxx:

045 = 45°; 090 = 90°; 120 = 120°

Adjustable mounting bracket:



120deg beam angle:

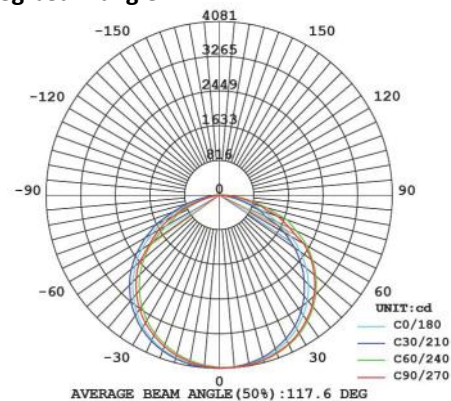

STL International Ltd

Hill Farm, Linton Hill, Maidstone, Kent, ME17 4AL, United Kingdom

t. +44(0)1622 749633, f. +44(0)1622 746800, e. solutions@stl-int.co.uk, www.stl-int.co.uk