




STL International Ltd
 Hill Farm, Linton Hill
 Linton, Maidstone
 Kent. ME17 4AL
 United Kingdom
 tel. +44 (0)1622 749633
 fax. +44 (0)1622 746800
 email. solutions@stl-int.co.uk
 web. www.stl-int.co.uk

Interior lighting fixtures – recessed
 Светильники для внутренних помещений потолочные встроенные



Application: areas with high IP requirements

Body: steel sheet. No plastic components are used.

Louvers: BAP combined with safety glass cover

System of fastening: recessed mounting into the false ceilings/ plasterboards. Minimum height of the false ceiling is 200 mm.



System of marking:
 HOUND – M600
 HOUND2 – M625
 HOUND3 – plasterboard
 HOUND4 – surface mounted (page 27)

Emergency version on request.

Technical parameters of the fixtures are referred in table on page 142.



Interior fluorescent lighting fixtures

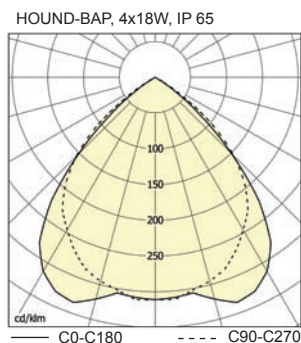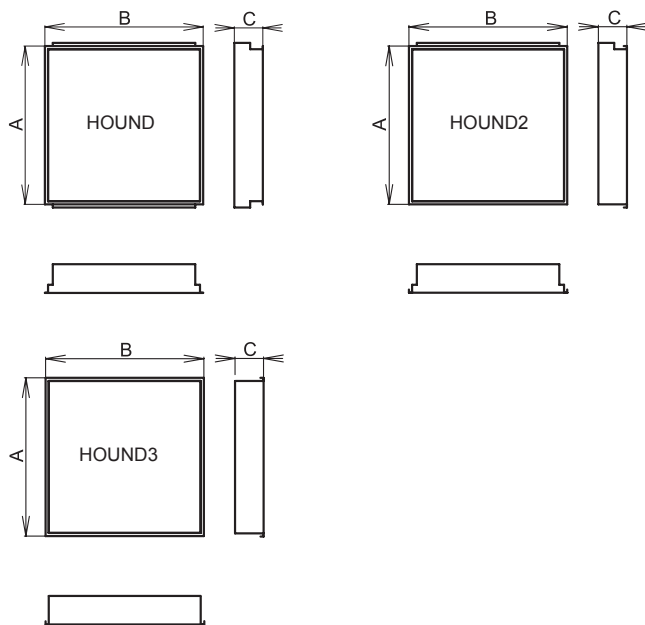

Order no	Model	Lamp/ socket	Dimensions [mm]	Weight [kg]
			A x B x C	
- inductive ballast, M600/ индуктивный дроссель, M600				
59349	HOUND-418-K, 4x18W	T26/G13	592 x 592 x 100	11,0
59350	HOUND-236-K, 2x36W		1194 x 295 x 100	
59351	HOUND-436-K, 4x36W		1194 x 592 x 100	21,0
59352	HOUND-258-K, 2x58W		1494 x 295 x 100	14,0
59397	HOUND-458-K, 4x58W		1494 x 592 x 100	-
- electronic ballast, M600/ электронный дроссель, M600				
59353	HOUND-414-EP, 4x14W	T16/G5	592 x 592 x 100	11,0
59354	HOUND-424-EP, 4x24W		1194 x 295 x 100	
59355	HOUND-228-EP, 2x28W		1194 x 592 x 100	20,0
59356	HOUND-254-EP, 2x54W			
59357	HOUND-428-EP, 4x28W			
59358	HOUND-454-EP, 4x54W			
- inductive ballast, M625/ индуктивный дроссель, M625				
59361	HOUND2-418-K, 4x18W	T26/G13	620 x 620 x 100	11,0
59362	HOUND2-236-K, 2x36W		1220 x 312 x 100	
59363	HOUND2-436-K, 4x36W		1220 x 620 x 100	21,0
59364	HOUND2-258-K, 2x58W		1520 x 312 x 100	14,0
- electronic ballast, M625/ электронный дроссель, M625				
59365	HOUND2-414-EP, 4x14W	T16/G5	620 x 620 x 100	11,0
59366	HOUND2-424-EP, 4x24W		1220 x 312 x 100	
59367	HOUND2-228-EP, 2x28W		1220 x 623 x 100	20,0
59368	HOUND2-254-EP, 2x54W			
59369	HOUND2-428-EP, 4x28W			
59370	HOUND2-454-EP, 4x54W			
- inductive ballast, plasterboard/ индуктивный дроссель, гипсокартон				
59373	HOUND3-418-K, 4x18W	T26/G13	655 x 660 x 100	-
59374	HOUND3-236-K, 2x36W		310 x 1267 x 100	-
59375	HOUND3-436-K, 4x36W		655 x 1267 x 100	-
59376	HOUND3-258-K, 2x58W		310 x 1570 x 100	-
- electronic ballast, plasterboard/ электронный дроссель, гипсокартон				
59377	HOUND3-414-EP, 4x14W	T16/G5	655 x 660 x 100	-
59378	HOUND3-424-EP, 4x24W		310 x 1267 x 100	
59379	HOUND3-228-EP, 2x28W		655 x 1267 x 100	-
59380	HOUND3-254-EP, 2x54W			
59381	HOUND3-428-EP, 4x28W			
59382	HOUND3-454-EP, 4x54W			
- special accessories / спец.оснащение				
51144	Set of brackets for HOOVER3/HOUND3 3x4x / комплект фиксаторов для HOOVER3/HOUND3 3x4x			
51143	Set of brackets for HOOVER3/HOUND3 1x2x / комплект фиксаторов для HOOVER3/HOUND3 1x2x			

Dimensions of mounting hole for series HOUND3/
 размеры монтажных отверстий для серии HOUND3 :

- 4 x 18W - 640 x 640 mm
- 2 x 36W - 1250 x 295 mm
- 4 x 36W - 1250 x 640 mm
- 2 x 58W - 1550 x 295 mm