


Fluorescent Luminaire IP66/68

MAINTENANCE FREE – SEALED FOR LIFE
10 year warranty*

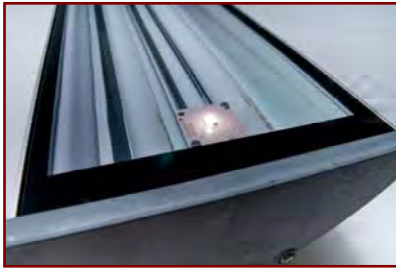

Article number	Wattage	Voltage	Termination	Weight (kg)	Lumen
TNAML218-I	2x18W	220-264Vac	JB – 2xM25	6.6	2600 Lumen
TNAML 236-I	2x36W	220-264Vac	JB – 2xM25	9.4	6000 Lumen
TNAML 258-I	2x58W	220-264Vac	JB – 2xM25	12.1	10400 Lumen
TNAML 218E90-I	2x18W	220-264Vac	JB – 2xM25	9.1	2600 Lumen
TNAML 236E90-I	2x36W	220-264Vac	JB – 2xM25	11.2	6000 Lumen
TNAML 258E90-I	2x58W	220-264Vac	JB – 2xM25	13.9	10400 Lumen

Features:

- ✚ Sealed for life construction – maintenance free design
- ✚ Fully Recyclable
- ✚ Seawater resistant anodised aluminium (compliant with NORSOK M-121, structural aluminium)
- ✚ Electronic ballast with EOL protection
- ✚ Pre-assembled long-life fluorescent lamps, colour 840
- ✚ Toughened glass lens
- ✚ Ambient temperature (for warranty):
-20°C to +45°C (Standard); -20°C to +30°C (Emergency)
- ✚ Supply voltage: 220V-264Vac 50/60Hz
- ✚ Ingress protection: IP66/68 (J/B sealed with Terostat sealant)
- ✚ 90min battery backup time as standard.
- ✚ Self-testing: full function test at random every 100 days (RED error LED)
- ✚ Sliding mounting brackets for easy and quick installation
- ✚ Entries: 2xM25 clearance entries
- ✚ 0.5-6mm² spring terminals wired for single phase looping



Optional:



- ✚ 110/120Vac, 50/60Hz
- ✚ Lamp colour 830
- ✚ Flying lead with sealed junction box, cable according to customer specification
- ✚ M25-M20 reducers
- ✚ 180min battery backup
- ✚ Compliant with HACCP Guidelines





* conditions apply

Dimensions:



2 x 58W

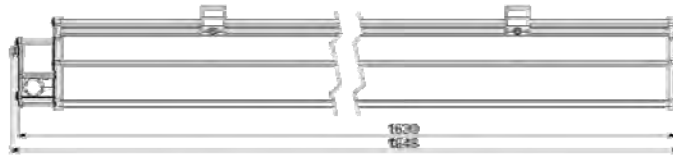

2 x 36W

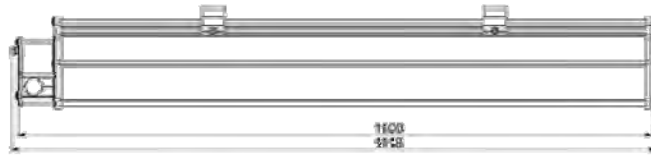

2 x 18W

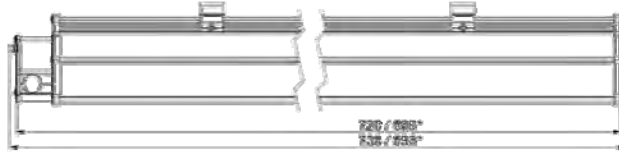


Universal mounting system:




* Emergency light version

Light distribution curve:

2xT8

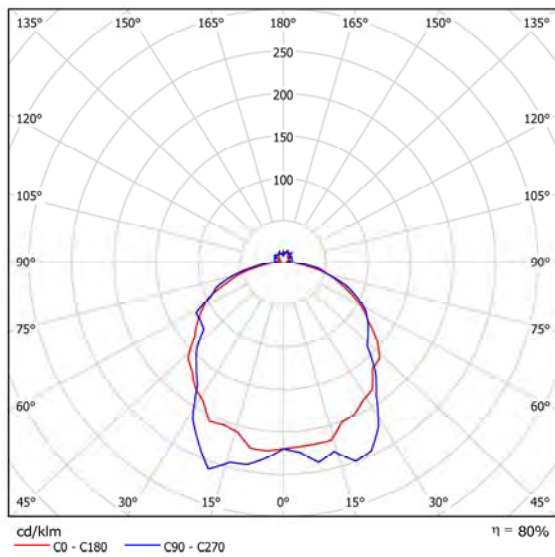

2xLED

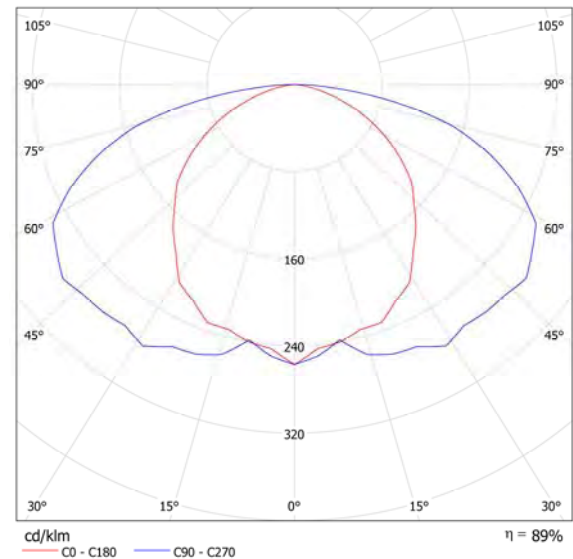

Mounting options:



SAFE answers to HAZARDOUS questions