

LED Helideck Perimeter Light - Green



ATEX Category 2


Ex II 2 G Ex e mb IIC T4 IP66

Certified for use in zone 1

Article number	Wattage	Voltage	Lens	Version	Entries
IHP-LED-G-230	7W	110-250Vac	Polycarbonate	Surface mounted	2 x M25

Features:

- ✚ Maintenance free high intensity power LED's with a life expectancy of 100,000 hours
- ✚ Compliant with CAP437, Chapter 4, para.3; ICAO annex 14, Volume II para.5.3.8; IMO standard, MODU code 2001 para.13.4.1
- ✚ Colour chromaticity: Green according to ICAO specification
- ✚ Marine grade gun metal housing
- ✚ UV and high impact resistant polycarbonate
- ✚ Shock and vibration resistant
- ✚ Very low power consumption, 7W only
- ✚ Ingress Protection: IP66
- ✚ 110-250Vac, 50/60Hz
- ✚ -40°C to +40°C ambient temperature
- ✚ Ex e terminal connection max.4mm
- ✚ Internal M5/external M6 earth connection
- ✚ Fixings: 4off Ø11mm on 200mm fixing circle
- ✚ Entries: 2 x M25x1.5
- ✚ Weight: 5.7kg

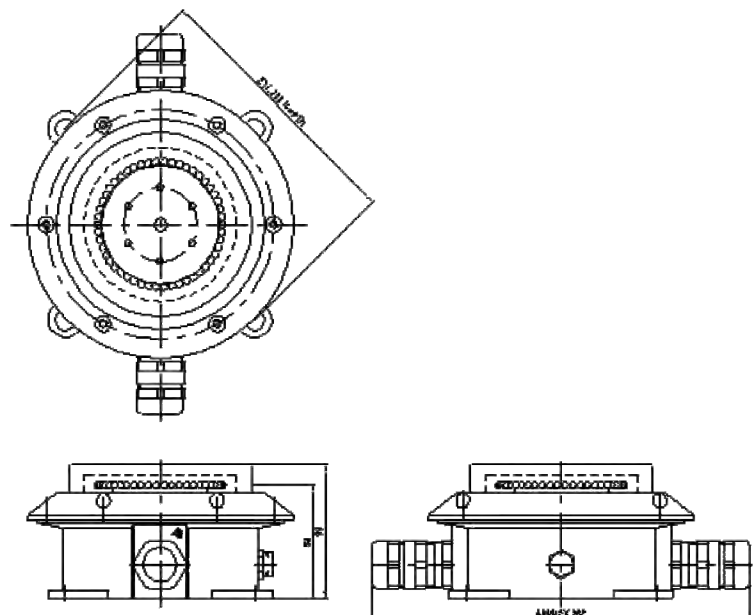

SAFE answers to HAZARDOUS questions