

# Fluorescent Luminaire Zone 1 Bulkhead

**MAINTENANCE FREE – SEALED FOR LIFE**  
**6 year warranty \***



**ATEX Category 2**

⊕ II 2 G Ex e mb II T6

⊕ II 2 D Ex tD A21 T80°C IP66

**Certified for use in zone 1 and 21**  
**KEMA 08ATEX0163**

Article number	Wattage	Voltage	Termination	Weight (kg)	Lumen
TNAML118-TEL	1x18W	220-240Vac	JB – 2xM25	4.5	1200 Lumen
TNAML118-TEL	1x18W	110 Vdc	JB – 2xM25	4.5	1200 Lumen

## Features:


- ✚ Sealed for life construction – maintenance free design  
Requires only visual inspection to IEC/EN 60079-17
- ✚ Fully Recyclable
- ✚ Seawater resistant anodised aluminium  
(compliant with NORSOK M-121, structural aluminium)
- ✚ Electronic ballast with EOL protection
- ✚ Pre-assembled long-life compact fluorescent lamp, colour 840
- ✚ Toughened glass lens
- ✚ Ambient temperature (for warranty):  
-20°C to +45°C (Standard)
- ✚ Supply voltage: 220-240Vac or 110Vdc
- ✚ Ingress protection: IP68 (J/B sealed with Terostat sealant)
- ✚ Sliding mounting brackets for easy and quick installation
- ✚ Entries: 2xM25 clearance entries
- ✚ 0.5-6mm<sup>2</sup> spring terminals wired for single phase looping



## Optional:

- ✚ Asymmetric reflector for walkway lighting

## Dimensions:

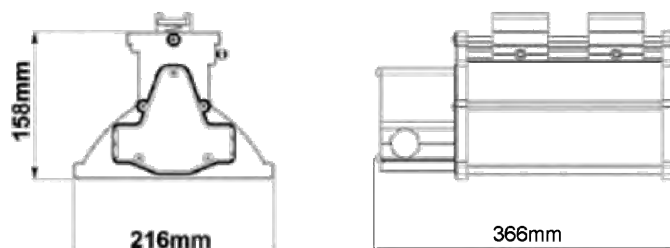

**SAFE answers to HAZARDOUS questions**