

SQL..-N-JCH – Induction Area Lighting Zone 2, IP66



ATEX Category 3

⊕ II 3 G Ex nA II T4 or T3



Certified for use in zone 2

**100,000 hours Maintenance Free
10 Year Warranty**

Article number	Lamp/Wattage	Voltage	Lens	Dimension (mm)	Weight (Kg)
SQL85-N-JCH-2	QL85, 1x85W	200-277Vac 50/60Hz	Glass	670 x 350 x 215	11.0
SQL165-N-JCH-2	QL165, 1x165W	200-277Vac 50/60Hz	Glass	670 x 350 x 215	13.0

Features:

- ✚ **10 year warranty, sealed for life**
- ✚ Cast aluminium body and lid (RAL 1001-Beige)
- ✚ Toughened glass lens, curved
- ✚ Aluminium reflector
- ✚ QL85(85W) or QL165(165W) induction lamp, colour 840 (4000K - cool white)
- ✚ Instant ignition and re-ignition
- ✚ Suitable for straight or curved poles with Dia. 42mm to 80mm
- ✚ Mounting bracket allows for continuous adjustment, 0° to 120°, from the outside
- ✚ Certified for use in zone 2
⊕ II 3 G Ex nA II T4 (85W) or T3 (165W)
- ✚ 200-277V 50/60Hz
- ✚ Ambient temperature: -20°C to +40°C
- ✚ Ingress protection IP66
- ✚ 12 meter flying lead, type QWPK 3x2.5mm² fitted as standard
- ✚ Wind exposed surface: Frontal 0.08m², Lateral 0.14m²

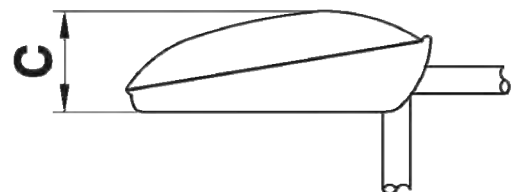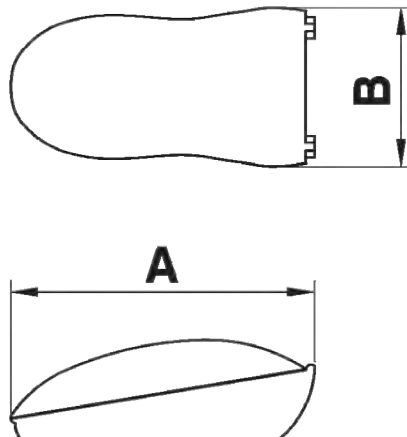

SAFE answers to HAZARDOUS questions